
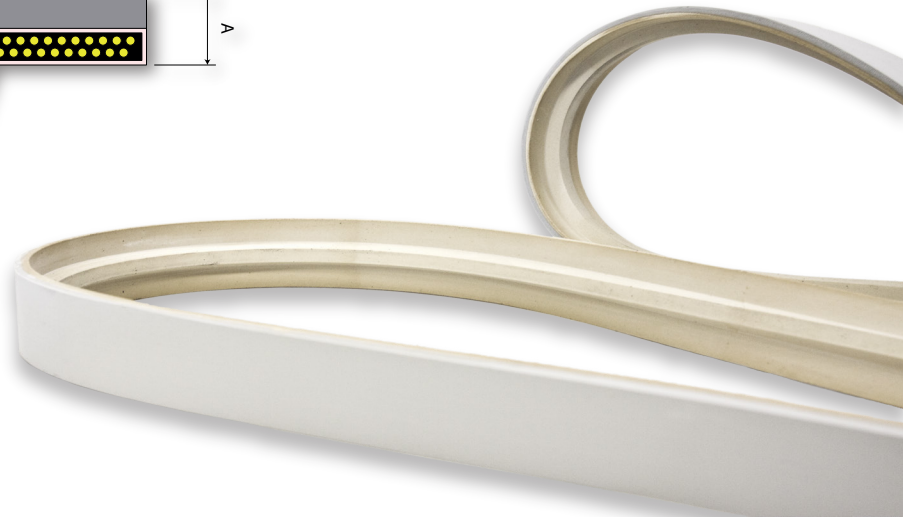


BWG-CR50WT-1000

BWG-CSM60GR-1000

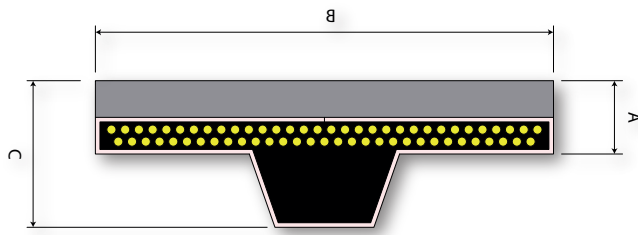

BOWLGRIP Datasheet

DIMENSION	A	B	C	V-GUIDE
mm	8	50	16	16x8

TENSILE CORE	BREAKING STRENGTH (DIN 53504)	MATERIAL	ELONGATION AT WORKING LOAD	ELONGATION AT BREAK
CTK 1000	1000 daN/cm	Aramide Cord	< 1%	> 5%

TOP COVER	HEAT RESIST	OIL RESISTANT	HARDNESS Sh.A	COLOR
CSM-GR	Up to 100 °C	Yes	Average 55	Grey
CR-WT	Up to 100 °C	Yes	Average 50	White

BOTTOM COVER	TYPE	COLOR
FABRIC	COT-PES	White



RR Endless